




BP5LN

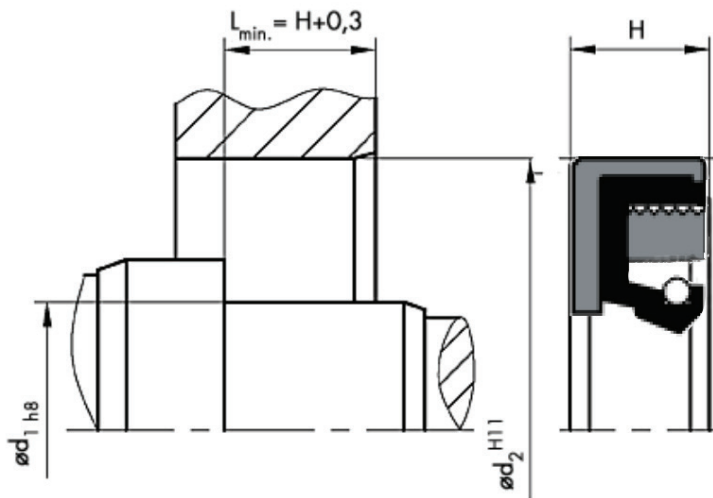

Technical Details

Operating conditions	
Shaft surface speed	16.25 m/sec
Temperature range	-29°C + 121°C
Maximum pressure	0 to 0.48 Bar

DESIGN

BP5LN is a general purpose double lip seal. It features a non-metallic composite for a damage free installation. BP5LN has a primary spring loaded lip with a non-spring loaded secondary lip for exclusion of light dust, fluids or contamination.

FEATURES

- Flexible for easy installation
- Long life
- Comes in a wide range of sizes
- Excludes light dust, fluids or contamination

MATERIAL

Seal design comes in a variety of materials and sizes. For more information, please refer to MSDS datasheet.

APPLICATIONS

For oil retention or grease retention.

General applications:

Electric motors, gearboxes, pumps, fans, runout tables, paper rolls, mixers, work rolls and custom equipments.