


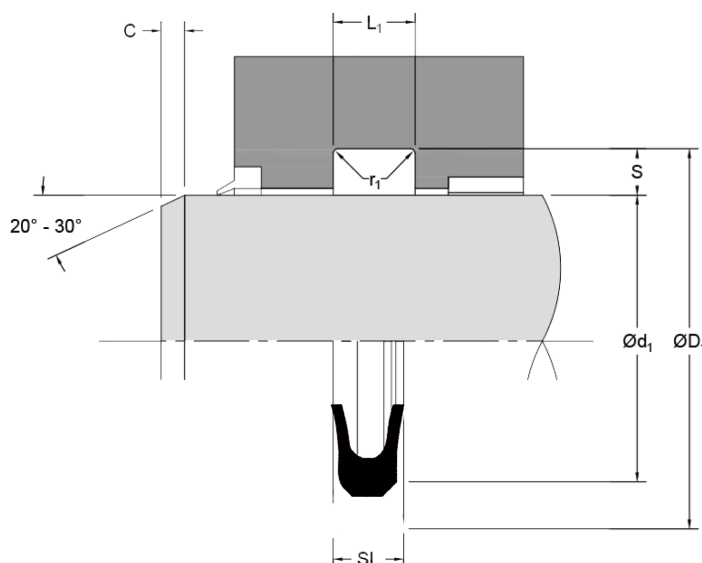

Technical Details

Operating conditions	Metric	Inch
Maximum speed	0.5 m/sec	1.5 ft/sec
Temperature range	-30°C + 90°C	-22°F + 212°F
Maximum pressure	30 Bar	500 p.s.i

Maximum extrusion gap

Pressure bar	10	30
Maximum gap in	0.028	0.024
Pressure p.s.i	150	500

Surface roughness

	µmRa	µmRt	µinCLA	µinRMS
Dynamic sealing face rod Ød ₁	0.1 - 0.4	4 max	4 -16	5 -18
Static sealing face ØD ₁	1.6 max	10 max	63 max	70 max
Dynamic sealing face Piston ØD ₁	0.1 - 0.4	4 max	4 - 16	5 - 18
Static sealing face piston Ød ₁	1.6 max	10 max	63 max	70 max
Sealing housing faces L ₁	3.2 max	16 max	125 max	140 max

Chamfers & Radii

Seal diameter ≤ S in	0.187	0.250	0.312	0.375	0.500
Min chamfer C in	0.093	0.125	0.156	0.187	0.217
Max fillet rad r ₁ in	0.008	0.016	0.016	0.032	0.032

Tolerances

	Ød ₁	ØD ₁	L ₁ mm	L ₁ in
Rod	f9	Js11	+0.25 - 0	+0.010 - 0
Piston	Js11	H9	+0.25 - 0	+0.010 - 0

DESIGN

PAS35 U ring is designed for low pressure pneumatic applications. The block U ring style can be used for pneumatic or light pressure applications in hydraulic cylinders.

Pressure ratings can be increased by using back-up rings.

FEATURES

- Long life
- Comes in a wide range of sizes

MATERIAL

Seal design comes in a variety of materials and sizes. For more information, please refer to MSDS datasheet.

APPLICATIONS

Light duty applications