


VP26

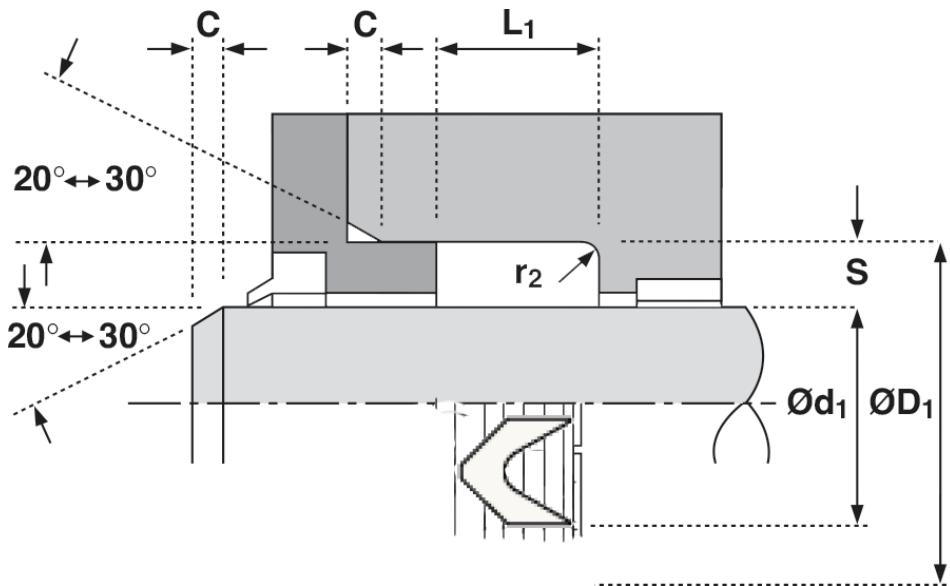

Technical Details

Metric

Inch

Operating conditions		
Maximum speed	0.5 m/sec	1.5 ft/sec
Temperature range	-30°C + 90°C	-22°F + 212°F
Maximum pressure	400 Bar	6000 p.s.i

Maximum extrusion gap

Pressure bar	100	150	240	400
Maximum gap mm	1500	2250	3500	6000
Pressure p.s.i	0.018	0.015	0.010	0.007

Surface roughness

	μmRa	μmRt	μinCLA	μinRMS
Dynamic sealing surface Rod - ϕd_1	0.1 - 0.4	4 max	4 - 16	5 - 18
Static sealing face Rod ϕD_1	1.6 max	10 max	63 max	70 max
Dynamic sealing surface Piston - ϕd_1	0.1 - 0.4	4 max	4 - 16	5 - 18
Static sealing face Piston ϕD_1	1.6 max	10 max	63 max	70 max
Static housing faces L_1	3.2 max	16 max	125 max	140 max

Chamfers & Radii

Groove section $\leq S$ in	0.187	0.250	0.312	0.375	0.437	0.500
Min chamfer C in	0.093	0.125	0.156	0.187	0.250	0.250
Max fillet rad r_1 in	0.020	0.031	0.031	0.031	0.031	0.031

Tolerances

	ϕd_1	ϕD_1
Rod	h10	H10
Piston	H10	h10

DESIGN

VP26 is normally used in multiples of vee rings with a male and female adaptor. They are stacked and must be lubricated with operating fluid prior to assembly.

The male adaptor fits into the veer ring on the pressure side and when pre-loaded, exerts a hinging action on the vee packer, forcing the sealing lips apart and ensuring a low pressure seal.